




# Silový kleštinový upínač

Pro upínací stopky DIN 1835 A+B+E a DIN 6535 HA+HB+HE

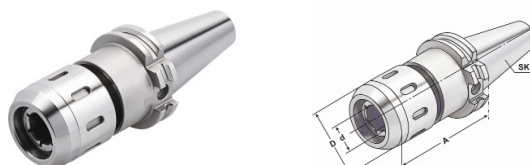

| Název             | Kužel | Rozsah        | D  | d  | A   |  |  | G 6,3<br>15.000 min <sup>-1</sup> |
|-------------------|-------|---------------|----|----|-----|---|---|-----------------------------------|
| SK40.90.S.20.ADB  | SK40  | 3 - 20 (RS20) | 53 | 20 | 90  | AD/B  | RS20K   | •                                 |
| SK40.105.S.25.ADB | SK40  | 3 - 25 (RS25) | 63 | 25 | 105 | AD/B  | RS25K   | •                                 |
| SK40.105.S.32.ADB | SK40  | 3 - 32 (RS32) | 68 | 32 | 105 | AD/B  | RS32K   | •                                 |
| SK50.90.S.20.ADB  | SK50  | 3 - 20 (RS20) | 53 | 20 | 90  | AD/B  | RS20K   | •                                 |
| SK50.90.S.25.ADB  | SK50  | 3 - 25 (RS25) | 63 | 25 | 90  | AD/B  | RS25K   | •                                 |
| SK50.90.S.32.ADB  | SK50  | 3 - 32 (RS32) | 68 | 32 | 90  | AD/B  | RS32K   | •                                 |

dodávka: bez montážního klíče

|                |            |             |             |
|----------------|------------|-------------|-------------|
| Velikost       | 20 mm      | 25 mm       | 32 mm       |
| Upínací moment | 50 - 70 Nm | 80 - 100 Nm | 80 - 100 Nm |
| Upínací síla   | 780 Nm     | 2000 Nm     | 2000 Nm     |