



# Upínač tepelný 4,5° s chladicími kanály

pro upínání nástrojů se stopkou TK a HSS

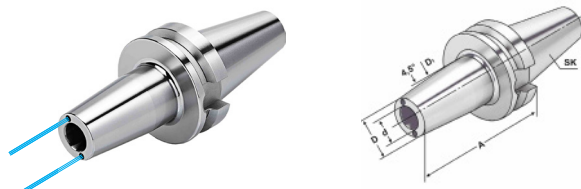

Název	Kužel	d	D	D <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	A		G 2,5 25.000 min <sup>-1</sup>
BT40.90.TK4.06.ADB	BT40	6	21	27	36	10	90	AD/B	•
BT40.90.TK4.08.ADB	BT40	8	21	27	36	10	90	AD/B	•
BT40.90.TK4.10.ADB	BT40	10	24	32	41	10	90	AD/B	•
BT40.90.TK4.12.ADB	BT40	12	24	32	46	10	90	AD/B	•
BT40.90.TK4.14.ADB	BT40	14	27	34	46	10	90	AD/B	•
BT40.90.TK4.16.ADB	BT40	16	27	34	49	10	90	AD/B	•
BT40.90.TK4.18.ADB	BT40	18	33	42	49	10	90	AD/B	•
BT40.90.TK4.20.ADB	BT40	20	33	42	51	10	90	AD/B	•
BT50.100.TK4.06.ADB	BT50	6	21	27	36	10	100	AD/B	•
BT50.100.TK4.08.ADB	BT50	8	21	27	36	10	100	AD/B	•
BT50.100.TK4.10.ADB	BT50	10	24	32	41	10	100	AD/B	•
BT50.100.TK4.12.ADB	BT50	12	24	32	46	10	100	AD/B	•
BT50.100.TK4.14.ADB	BT50	14	27	34	46	10	100	AD/B	•
BT50.100.TK4.16.ADB	BT50	16	27	34	49	10	100	AD/B	•
BT50.110.TK4.18.ADB	BT50	18	33	42	49	10	110	AD/B	•
BT50.110.TK4.20.ADB	BT50	20	33	42	51	10	110	AD/B	•

pro průměry stopek 6 až 25 s tolerancí h6  
vhodné pro přístroje, které používají ohřev indukční, kontaktní a teplým vzduchem

l<sub>1</sub> = maximální upínací délka

l<sub>2</sub> = maximální délkové nastavení