


# Tažné čepy

JIS B 6399 (MAS 403 BT) prodloužené + 3 mm

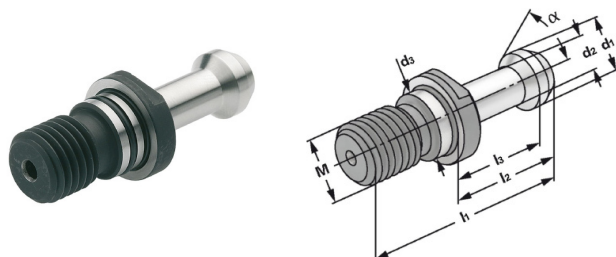


vrtaný s „0“ kroužkem

Název	M	$\alpha$	$l_1$	$l_2$	$l_3$	$d_1$	$d_2$	$d_3$	$d_4$
6399.M16.45.K0.3	M16	45°	57	32	25	15	10	17	4,0
6399.M16.60.K0.3	M16	60°	57	32	25	15	10	17	4,0
6399.M16.90.K0.3	M16	90°	57	32	25	15	10	17	4,0

nevrtaný s „0“ kroužkem

Název	M	$\alpha$	$l_1$	$l_2$	$l_3$	$d_1$	$d_2$	$d_3$
6399.M16.45.0.3	M16	45°	57	32	25	15	10	17
6399.M16.60.0.3	M16	60°	57	32	25	15	10	17
6399.M16.90.0.3	M16	90°	57	32	25	15	10	17

DIN 2080 s drážkou Ott

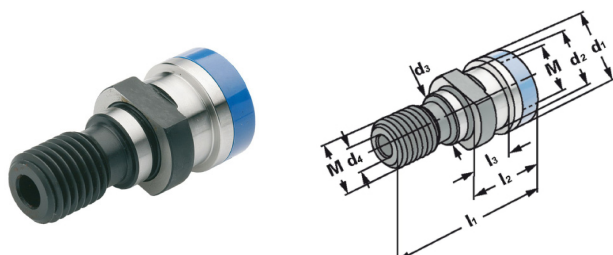

vrtaný s vnitřním závitem

Název	M	$l_1$	$l_2$	$l_3$	$d_1$	$d_2$	$d_3$	$d_4$
2080.M16.K	M16	53,0	25,1	13,6	25,00	21,1	17	7,0
2080.M24.K	M24	65,1	25,1	13,3	39,60	32,0	25	7,0